

MODELS M1 RETRO and M1/AC

Low Voltage Holiday Detector "Wet Sponge"

CARRY ALL

INKER - RASOR.COM

MODEL M1 RETRO



AVAILABLE FROM STOCKA

Features:

- 67.5v Output
- Calibration Test
- Kit includes sponge
- Canvas carry-all bag
- 9V Battery operated



Model M1/AC: AC Powered unit for in-plant operations

Distributed by:



AB: (587) 758-8367 ON: (905) 688-5800

info@stone-tucker.com

www.stone-tucker.com

teststations.com

detectron.com

Info@tinker-rasor.com | tinker-rasor.com

INKER & MASOR

PRODUCT DATA SHEET | MODELS M1 RETRO AND M1/AC

FEATURES:

- Regulated 67.5v Output
- Sponge type holiday detector
- Push button calibration check
- 2 Resistance settings
 - 80Ω for tanks and pipe
 - 90Ω for coatings on concrete
- Use on thin film coatings
- Non-destructive

CONSTRUCTION:

 Tough, belt worn case, strong, lightweight wand handle

APPLICATIONS:

Use on thin film coatings up to 20 mils) on conductive substrates such as tanks, concrete

RECOMMENDATIONS:

- Conforms to standards for low voltage holiday detection: NACE International SP0188, TM0384 ASTM D5162-A
- Annual factory calibration recommended

SPECIFICATIONS:

67.5v D.C. Output 80 Ω* Resistance for coating on metal 90 Ω Resistance for coatings on concrete

(*factory setting is 80Ω. See Instructions for information on changing setting to 90Ω)

DIMENSIONS:

M1 Retro Use:

4.25" x 5" x 2" Case, 1.5 lbs

(127mm x 101.6mm x 50.8mm, .45kg)

Shipping: 20" x 5.5" x 4", 3 lbs.

(508mm x 139.7mm x 101.6mm, 1.35kg)

M1/AC Use:

SERVICE:

5.75" x 12.25" x 10", 10 lbs

(146mm x 311mm x 254mm, 4.5kg)

Shipping: 14" x 12" x 6", 12 lbs.


(355.6mm x 304.8mm x 15.24mm, 5.44kg)

DELIVERY: Immediately from STOCK

F.O.B. New Braunfels, TX USA

24-hour Turn-Around TERMS: Net 30 Days, on approval of credit

WARRANTY: 90 Days, parts and labor

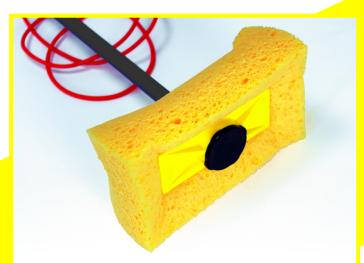

New Sponge and Wand materials - Thick sponge material, Very strong, lightweight Wand.





Model M1/AC shown with connection on side of case. AC connection and external alarm connection on back of instrument case. External alarm can be used for audible or visual holiday indicator.



AVAILABLE FROM STOCK

tinker-rasor.com