


TINKER & RASOR

MODEL CS-10

10 AMP PORTABLE CURRENT SUPPLY

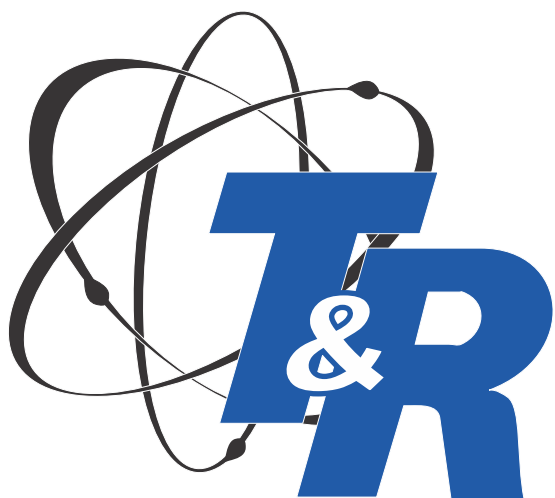

For Cathodic Protection Testing

- 0 - 10 Amps Adjustable Output
- LCD Display for Current Adjustment
- 1 milliamp resolution
- Continuous or Interrupted Operation
- Internal 12v Rechargeable Battery
- Use with External 12v DC Power
- Weather resistant, lockable case



AVAILABLE FROM STOCK!

Distributed by



AB: (587) 758-8367
ON: (905) 688-5800
info@stone-tucker.com
www.stone-tucker.com

The CS-10 portable current supply is an ideal DC current source for many cathodic protection corrosion maintenance tests. Commonly used for determining current requirements for cathodic protection or impressing current on an underground structure for assisting in locating electrical contacts with foreign systems such as underground utilities.


www.teststations.com

www.tinker-rasor.com

www.detectron.com

Info@tinker-rasor.com

Tinker & Rasor quality is found in our products,
our people and our customer service.





TINKER & RASOR

CORROSION MITIGATION INSTRUMENTATION

PRODUCT DATA SHEET

MODEL CS-10 Portable Current Supply

Features:

- Adjustable DC Output from 0 to 10 Amps
- External Power input (12v DC)
- Output Range: 1 Amp, 10 Amp
- Continuous Operation
- Interrupter Timing:
 - 0.2 sec OFF - 0.8 sec ON
 - 0.3 sec OFF - 0.7 sec ON
 - 1 sec OFF - 4 sec ON
 - 2 sec OFF - 8 sec ON
 - 6 sec OFF - 14 sec ON
- LCD display of output, 1mA resolution
- Portable
- Lightweight, only 6 lbs

Construction:

- Near indestructible case
- Weather sealed
- Lockable lid
- Built for rugged use

Applications:

- CP Current Requirements
- CP Maintenance Tests
- Locating shorts and contacts
- Casing shorts
- Insulator testing and locating
- DCVG

Environment:

0°C to 50°C (32°F to 122°F)

Specifications:

12v DC Output
12v LiFePO4 Battery (rechargeable)
9v Battery (replaceable)

Use Dimensions:

5.75" x 12.25" x 10", 6 lbs
(146mm x 311mm x 254mm, 2.72kg)

Shipping Dimensions:

14" x 12" x 6", 8 lbs
(355.6mm x 304.8mm x 15.24mm, 3.63kg)



NEW! Redesigned panel layout and now with rechargeable Li battery

NEW!
Faster
interrupt
cycles

INTERRUPT CYCLES

| Pos | Sec. Off/On |
|-----|-------------|
| 1 | CONTINUOUS |
| 2 | 0.2 - 0.8 |
| 3 | 0.3 - 0.7 |
| 4 | 1 - 4 |
| 5 | 2 - 8 |
| 6 | 6 - 14 |

DELIVERY: **Immediately from STOCK**
F.O.B. San Bernardino, CA USA
SERVICE: **24-hour Turn-Around**
TERMS: Net30 Days, on approval of credit
WARRANTY: **90 Days**, parts and labor

AVAILABLE FROM STOCK