



MODEL M/1

LOW VOLT HOLIDAY DETECTOR

**AVAILABLE
FROM STOCK!**



M/1 LOW VOLT KIT:



**Conforms to
International
Standards: USA, UK,
AUSTRALIA, JAPAN,
and more**



Features:

- **Outputs: 9v, 67.5v, 90v**
- **Ergonomic Design**
- **Twist Lock Ground Cable**
- **Strong Fiberglass Wand**
- **Plastic Sponge Holder**
- **3.5 mm Headphone Jack**
- **Optional Configurations Available Upon Request**

KIT INCLUDES:

- Instrument, with battery
- Wand, 18 in. Extension
- Sponge Electrode
- Wand, 16 in. w/red cable
- 15 ft. Ground cable
- Screwdriver
- 4 oz. Water wetter
- Canvas Carryall

Distributed by:



AB: (587) 758-8367
ON: (905) 688-5800
info@stone-tucker.com
www.stone-tucker.com

teststations.com

detectron.com

Info@tinker-rasor.com | tinker-rasor.com

Tinker & Razor quality is found in our products, our people and our customer service.

TINKER & RASOR

PRODUCT DATA SHEET | MODEL M/1 LOW VOLT HOLIDAY DETECTOR

FEATURES:

- 4 Output voltages conform to various standards
- Wet Sponge - type holiday detector
- For use on thin film coatings up to 20 mils
- Grounding confirmation
- Visual and Audible Alarms
- Battery operated (9v)
- 3.5 mm Headphone jack

CONSTRUCTION:

- All in One "Stick" type
- Impact resistant plastic case
- Sealed from weather
- Durable fiberglass wand handle
- Long life locking ground cable

APPLICATIONS:

- For use on thin film coatings on conductive substrates such as tanks, concrete, etc.

STANDARDS:

- Conforms to various international standards for low voltage holiday detection, including: ISO 14654, ISO 8289-A, ASTM G62, G6, D5162, BS EN ISO 28765, AMPP SP0188, TM0384, Australia AS 3894.2, Japan JIS K 6766
- Annual factory calibration recommended

SPECIFICATIONS:

Outputs

- 9v DC, 90k ohm Sensitivity, +/-5%
- 67.5v DC, 80k ohm Sensitivity, +/-5%
- 67.5v DC, 90k ohm Sensitivity, +/-5%
- 90v DC, 400k ohm Sensitivity, +/-5%

DIMENSIONS:

- M/1: 13" x 2" x 1.75" Case, 1 lb (330mm x 50.8mm x 44.45mm, .45kg)
- Shipping: 21" x 6" x 5", 4 lbs. (533.4mm x 152.4mm x 127mm, 1.81kg)

DELIVERY: **Immediately from STOCK**
F.O.B. New Braunfels, TX USA

SERVICE: **24-hour Turn-Around**

TERMS: Net 30 Days, on approval of credit


WARRANTY: **1 year**, parts and labor



KIT INCLUDES:

- Instrument, with battery
- Sponge Electrode
- 15 ft. Ground cable
- 4 oz. Water wetter
- Wand, 18 in. Extension
- Wand, 16 in. w/red cable
- Screwdriver
- Canvas Carryall

MODEL M/1

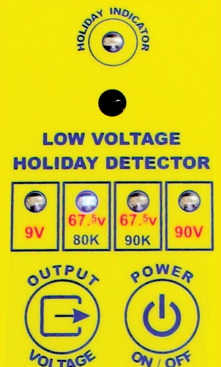


LED = Output Voltage
LED flash = No Ground
All LED flash = Low Batt

Incredibly strong and light weight wand material reduces fatigue, won't bend



Custom electrodes available

New sponge material is thicker and stronger. Sponge holder is plastic and will not damage coatings



Easy battery access. Uses common, easily found 9v battery



AVAILABLE FROM STOCK

tinker-rasor.com